

ED1046 Series

DC/DC Switching Converter
 • 45Watts Max.



Features

- Wide Input Range
- RoHS Compliance
- Input Voltage Protective Installation
- Over Voltage Protective Installation
- Over Current Protective Installation
- Over Temperature Protective Installation
- Short Circuit Protective Installation
- LED Indication
- MTBF > 30,000 hours

ED1046 xx - vv PP

xx: Output Voltage

vv: Specified output voltage. I.e 24 is 24Vdc

PP: Connector type. I.e 01 for EDACPOWER standard dc cable or please refer to the appendix page

Electrical Specifications

MODEL No.	MAX. OUTPUT POWER (W)	INPUT VOLTAGE (Vdc)	OUTPUT VOLTAGE (Vo)	LOAD		LOAD REGULATION	LINE REGULATION	RIPPLE & NOISE
				MIN. (Io)	MAX. (Io)			
ED1046	45W	11V~32V	20V	0A	2.25A	± 5%	± 1%	360mV
ED1046A	45W	11V~32V	20V	0A	2.25A	± 5%	± 1%	360mV

NOTE:

1 : Ripple & noise is measured by using 20MHz bandwidth limited oscilloscope and terminated each output with a 0.1uF ceramic capacitor & parallel with 47uF aluminum capacitor at full load and nominal line.

2 : Max. Output Power (W) ≥ Vo x Io

Electrical Specifications

INPUT

- Input Range 11 to 32 Vdc
- Input Current ≤ 6.3A
- Inrush Current No Damage to relative components
- Efficiency 88% Typ.
- Turn On Time ≤ 3S

OUTPUT

- Over Voltage Protection Auto Recovery
- Short Circuit Protection Auto Recovery
- Over Current Protection Auto Recovery
- Over Temperature Protection Auto Recovery


ENVIRONMENTAL

- Operating Temperature 0 to 40°C
- Storage Temperature -20 to 85°C
- Storage Humidity 5% to 95%

SAFETY

- CE, FCC

Mechanical Specification

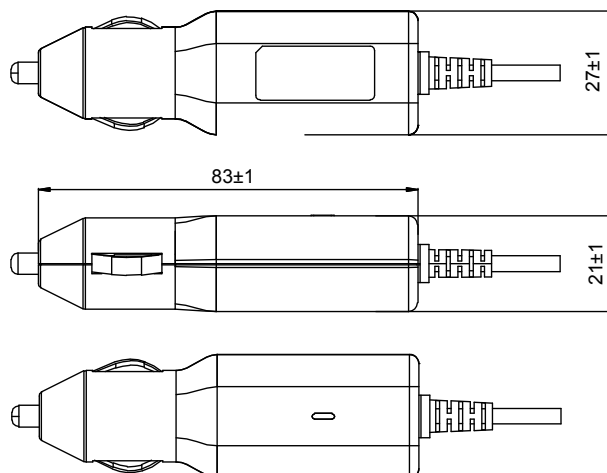

- Case Size: 83L x 27W x 21H (mm)
- Weight: 40g