

### Features

- DoE Compliance
- RoHS Compliance
- Over Voltage Protective Installation
- Over Current Protective Installation
- Short Circuit Protective Installation
- Protection Type: Recovery
- MTBF > 100,000 hours

### EA1019 X Y Z T- vv PP

- x:** Output range  
**Y:** Case type (V)Vertical or (H)Horizontal to denote different enclosure  
**z:** AC Plug type: • U: USA • E: EU • K: UK • A: SAA • C: CHINA  
**T:** Output type: • S (SR)  
**vv:** Specified output voltage, ie 24 is 24Vdc  
**PP:** Connector type, ie 01 for EDACPOWER standard dc cable or please refer to the appendix page

### Electrical Specifications

MODEL No.	MAX. OUTPUT POWER (W)	OUTPUT VOLTAGE (Vo)	MIN. LOAD (Io)	MAX. LOAD (Io)	LOAD REGULATION	LINE REGULATION	RIPPLE & NOISE
EA1019A	15W	5-8V	0A	3.0A	±5%	±1%	100mV
EA1019B	20W	9-13V	0A	2.0A	±5%	±1%	180mV
EA1019C	20W	14-19V	0A	1.42A	±5%	±1%	200mV
EA1019D	20W	20-27V	0A	1.0A	±5%	±1%	250mV
EA1019E	20W	28-35V	0A	0.71A	±5%	±1%	280mV
EA1019F	20W	36-48V	0A	0.55A	±5%	±1%	360mV
EA1019G	18W	5-8V	0A	3.0A	±5%	±1%	100mV
EA1019H	24W	9-13V	0A	2.0A	±5%	±1%	180mV
EA1019J	24W	14-19V	0A	1.71A	±5%	±1%	200mV
EA1019K	24W	20-27V	0A	1.2A	±5%	±1%	250mV
EA1019M	24W	28-35V	0A	0.85A	±5%	±1%	280mV
EA1019N	24W	36-48V	0A	0.66A	±5%	±1%	360mV

**NOTE:**

- 1 : Ripple & noise is measured by using 20MHz bandwidth limited oscilloscope and terminated each output with a 0.1uF ceramic capacitor & parallel with 47uF aluminum capacitor at full load and nominal line.
- 2 : Line regulation is defined by changing ±10% of input voltage from nominal line at rated load.
- 3 : Max. Output Power (W) ≥Vo x Io

### Electrical Specifications

**INPUT**

- Input Range 100Vac to 240 VAC
- Frequency 50 to 60Hz
- Input Current ≤0.8A
- Inrush Current ≤80A at 230 Vac At cold start, maximum load
- Turn On Time ≤3S

**OUTPUT**

- Over Voltage Protection Auto Recovery
- Short Circuit Protection Auto Recovery
- Over Current Protection Auto Recovery
- Efficiency Meet CEC Level VI (DoE), CoC Tier 2
- No Load power ≤0.1W


**ENVIRONMENTAL**

- Operating Temperature 0 to 40°C
- Storage Temperature -20 to 85°C
- Storage Humidity 5% to 90%

**SAFETY**

- UL/cUL, TUV, CB, CE, FCC, CCC

### Mechanical Specification

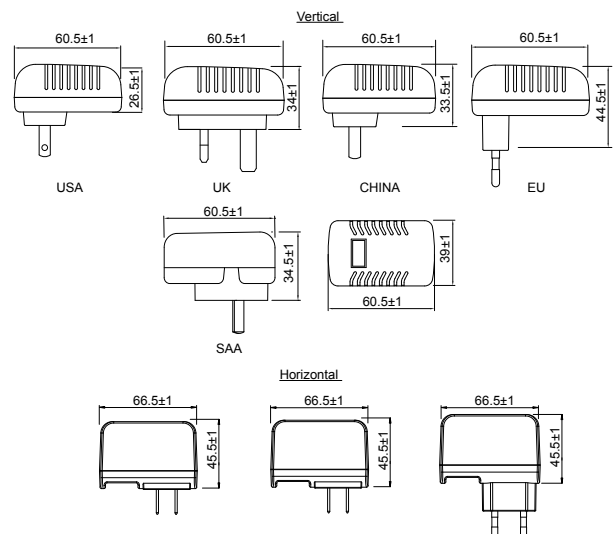

- Case Size: Vertical: 60.5L x 39W x 26.5H (mm)  
Horizontal: 66.5L x 26W x 45.5H (mm)
- AC Plug: U: USA, E: EU, K: UK, A: SAA, C: CHINA
- Weight: 120g