

Lead-Acid Battery Charger



Features

- Lead-Acid Battery Charger
- Constant Power Charging Mode
- Battery Polarity Reverse Protection
- 2 LED Charging Indicator
- 2 Step Fast Charging Capability
- Protections:
 - Short circuit / Over voltage / Over current
 - Over temperature
- MTBF > 50,000 hours
- Recommend for 24V/15~45Ah Lead-Acid Battery

EA1118 Y - vv PP

- Y:** Charge current
vv: Specified output voltage, i.e. 24 is 24VDC
PP: DC plug type

General Specification

OUTPUT

MODEL No.	FAST CHARGE CURRENT	MAINTAINING CHARGE VOLTAGE	FLOATING CHARGE VOLTAGE
EA1118D	4A	29.4V	27.5V
EA1118C	4.5A	29.4V	27.5V

NOTE:

- 1 : Ripple & Noise is measured by using 20MHz bandwidth limited oscilloscope and terminated each output with a 0.1uF ceramic capacitor & parallel with 47uF aluminum capacitor at full load and nominal line.
- 2 : Line regulation is defined by changing $\pm 10\%$ of input voltage from nominal line at rated load.
- 3 : Max. Power (W) $\geq V_o \times I_o$

INPUT

- Input Range: 100 to 240 VAC
- Frequency: 50 to 60Hz
- Input Current: 3.2A Max.
- Inrush Current: $\leq 120A/230VAC$
- Hold Up Time: $\geq 8.3ms$
- Turn On Time: $\leq 3s$


PROTECTION

- Short Circuit Protection: Auto Recovery
- Over Voltage Protection: Auto Recovery
- Over Current Protection: Auto Recovery
- Over Temperature Protection: Auto Recovery

ENVIRONMENT

- Operating Temperature: -20 to 40°C
- Storage Temperature: -20 to 85°C
- Operating Humidity: 10% to 90%
- Storage Humidity: 5% to 95%

MECHANICAL

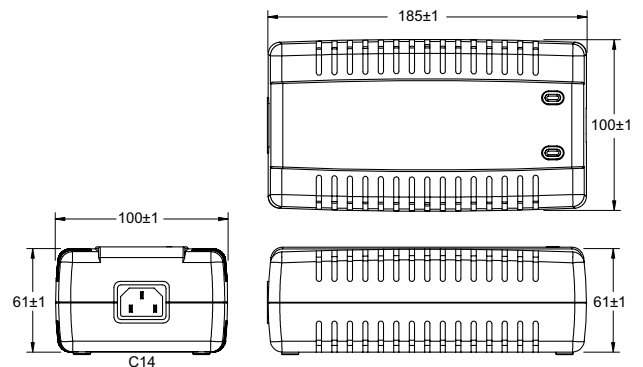

- Case Size: 185L x 100W x 61H (mm)
- AC Inlet: C14
- Weight: 650g

SAFETY

- Complied with UL 1012, CSA C22.2 No. 107.2-01, EN/IEC 60335-1/EN IEC 60335-2-29, FCC Part 15B, CE EMC(EN 55014-1+EN 55014-2)