

DC/DC Switching Converter



Features

- Input Voltage Protection
- LED Indicator
- Protections:
 - Short circuit / Over voltage / Over current
 - Over temperature
- Efficiency 85% Min. Nominal Input
- MTBF > 50,000 hours

ED1075 - vv PP

vv: Specified output voltage, i.e. 24 is 24VDC

PP: DC plug type, i.e. Code 01 for 5.5x2.1mm or other options (refer to the appendix page)

General Specification

OUTPUT

MODEL No.	MAX. OUTPUT POWER (W)	INPUT VOLTAGE (Vdc)	OUTPUT VOLTAGE (Vo)	LOAD		LOAD REGULATION	LINE REGULATION	RIPPLE & NOISE
				MIN. (Io)	MAX. (Io)			
ED1075	75W	11~16V	15~24V	0A	4A	± 5%	± 1%	200mV

NOTE:

- 1 : Ripple & Noise is measured by using 20MHz bandwidth limited oscilloscope and terminated each output with a 0.1uF ceramic capacitor & parallel with 47uF aluminum capacitor at full load and nominal line.
- 2 : Line regulation is defined by changing ±10% of input voltage from nominal line at rated load.
- 3 : Max. Power (W) ≥ Vo x Io

INPUT

- Input Range: 11 to 16 VDC
- Input Current: 7A Max.
- Turn On Time: ≤ 3s


OUTPUT

- Short Circuit Protection: Latch-off
- Over Voltage Protection: Auto Recovery
- Over Current Protection: Latch-off
- Over Temperature Protection: Auto Recovery

ENVIRONMENT

- Operating Temperature: -20 to 40°C
- Storage Temperature: -20 to 85°C
- Operating Humidity: 10% to 90%
- Storage Humidity: 5% to 95%

MECHANICAL

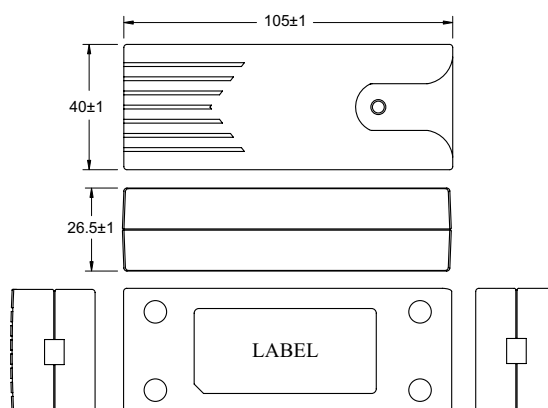

- Case Size: 105L x 40W x 26.5H (mm)
- DC Input : 600mm cable + cigarette plug
- Weight: 220g

SAFETY

- Complied with FCC, CE