

Medical AC/DC Interchangeable Adaptor

Features

- 2 x MOPP Compliance, IEC/EN60601-1 Approval
- LPS Compliance
- Protections:
 - Short circuit / Over voltage / Over current
- Energy Efficiency Level VI
- No Load Power Consumption $\leq 0.1W$
- MTBF > 100,000 hours

EM1024 X R - vv PP

- X:** Output range
R: Interchangeable AC plug:
 - U: USA • E: EU • K: UK • A: SAA • C: China
 - S: South Africa • B: Korea • I: India**vv:** Specified output voltage, i.e. 12 is 12VDC
PP: DC plug type, i.e. Code 01 for 5.5x2.1mm or other options (refer to the appendix page)



General Specification

OUTPUT

MODEL No.	MAX. OUTPUT POWER (W)	OUTPUT VOLTAGE (Vo)	MIN. LOAD (Io)	MAX. LOAD (Io)	LOAD REGULATION	LINE REGULATION	RIPPLE & NOISE
EM1024AR	16W	5~8V	0A	2A	$\pm 5\%$	$\pm 1\%$	100mV
EM1024BR	20W	5~8V	0A	3A	$\pm 5\%$	$\pm 1\%$	100mV
EM1024CR	24W	5~8V	0A	4A	$\pm 5\%$	$\pm 1\%$	100mV
EM1024DR	18W	9~11V	0A	1.5A	$\pm 5\%$	$\pm 1\%$	250mV
EM1024ER	24W	9~11V	0A	2A	$\pm 5\%$	$\pm 1\%$	250mV
EM1024FR	27W	9~11V	0A	3A	$\pm 5\%$	$\pm 1\%$	250mV
EM1024GR	20W	12~17V	0A	1.66A	$\pm 5\%$	$\pm 1\%$	250mV
EM1024HR	30W	12~17V	0A	2.5A	$\pm 5\%$	$\pm 1\%$	250mV
EM1024JR	24W	18~24V	0A	1.33A	$\pm 5\%$	$\pm 1\%$	350mV
EM1024KR	30W	18~24V	0A	1.66A	$\pm 5\%$	$\pm 1\%$	350mV
EM1024MR	20W	36~48V	0A	0.55A	$\pm 5\%$	$\pm 1\%$	480mV
EM1024NR	30W	36~48V	0A	0.83A	$\pm 5\%$	$\pm 1\%$	480mV
EM1024PR	36W	12V	0A	3A	$\pm 5\%$	$\pm 1\%$	250mV
EM1024QR	24W	12V	0A	2A	$\pm 5\%$	$\pm 1\%$	250mV
EM1024RR	36W	24V	0A	1.5A	$\pm 5\%$	$\pm 1\%$	350mV

NOTE:

- 1 : Ripple & Noise is measured by using 20MHz bandwidth limited oscilloscope and terminated each output with a 0.1uF ceramic capacitor & parallel with 47uF aluminum capacitor at full load and nominal line.
- 2 : Line regulation is defined by changing $\pm 10\%$ of input voltage from nominal line at rated load.
- 3 : Max. Power (W) $\geq V_o \times I_o$

INPUT

- Input Range: 100 to 240 VAC
- Frequency: 50 to 60Hz
- Input Current: $\leq 1A$
- Inrush Current: $\leq 60A/230VAC$
- Hold Up Time: $\geq 8.3ms$
- Turn On Time: $\leq 3s$

PROTECTION

- Short Circuit Protection: Auto Recovery
- Over Voltage Protection: Latch-off
- Over Current Protection: Auto Recovery


ENVIRONMENT

- Operating Temperature: -20 to 40°C
- Storage Temperature: -20 to 85°C
- Operating Humidity: 10% to 90%
- Storage Humidity: 5% to 95%

SAFETY

- Certified for whole series: ANSI/AAMI ES60601-1, CAN/CSA-C22.2 No. 60601-1, TUV EN 60601-1, CB IEC 60601-1, CE EMC(EN 60601-1-2) TUV EN 62368-1, CB IEC 62368-1, FCC Part 15B, CE EMC(EN 55032+EN 55035), CCC, UKCA
- Certified for assigned models: PSE, RCM, NRCAN, Argentina

MECHANICAL

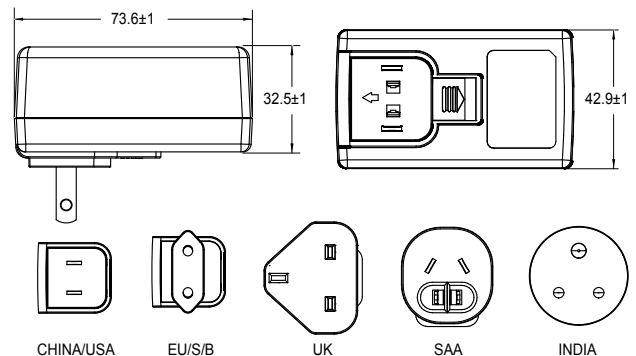

- Case Size: 73.6L x 42.9W x 32.5H (mm)
- AC Plug: U: USA, E: EU, K: UK, A: SAA, C: China
S: South Africa, B: Korea, I: India
- Weight: 200g