

Medical AC/DC Desktop Adaptor

Features

- 2 x MOPP Compliance, IEC/EN60601-1 Approval
- LED Indicator (optional)
- LPS Compliance
- Protections:
 - Short circuit / Over voltage / Over current
- Energy Efficiency Level VI
- No Load Power Consumption $\leq 0.1W$
- MTBF > 100,000 hours



EM1024 X Y - vv PP

- X:** Output range
Y: AC inlet: 1. C14 2. C8 3. C6 6. C18
vv: Specified output voltage, i.e. 12 is 12VDC
PP: DC plug type, i.e. Code 01 for 5.5x2.1mm or other options (refer to the appendix page)

General Specification

OUTPUT

MODEL No.	MAX. OUTPUT POWER (W)	OUTPUT VOLTAGE (Vo)	MIN. LOAD (Io)	MAX. LOAD (Io)	LOAD REGULATION	LINE REGULATION	RIPPLE & NOISE
EM1024AY	16W	5~8V	0A	2A	$\pm 5\%$	$\pm 1\%$	100mV
EM1024BY	20W	5~8V	0A	3A	$\pm 5\%$	$\pm 1\%$	100mV
EM1024CY	24W	5~8V	0A	4A	$\pm 5\%$	$\pm 1\%$	100mV
EM1024DY	18W	9~11V	0A	1.5A	$\pm 5\%$	$\pm 1\%$	250mV
EM1024EY	24W	9~11V	0A	2A	$\pm 5\%$	$\pm 1\%$	250mV
EM1024FY	27W	9~11V	0A	3A	$\pm 5\%$	$\pm 1\%$	250mV
EM1024GY	20W	12~17V	0A	1.66A	$\pm 5\%$	$\pm 1\%$	250mV
EM1024HY	30W	12~17V	0A	2.5A	$\pm 5\%$	$\pm 1\%$	250mV
EM1024JY	24W	18~24V	0A	1.33A	$\pm 5\%$	$\pm 1\%$	350mV
EM1024KY	30W	18~24V	0A	1.66A	$\pm 5\%$	$\pm 1\%$	350mV
EM1024MY	20W	36~48V	0A	0.55A	$\pm 5\%$	$\pm 1\%$	480mV
EM1024NY	30W	36~48V	0A	0.83A	$\pm 5\%$	$\pm 1\%$	480mV
EM1024PY	36W	12V	0A	3A	$\pm 5\%$	$\pm 1\%$	250mV
EM1024QY	24W	12V	0A	2A	$\pm 5\%$	$\pm 1\%$	250mV
EM1024RY	36W	24V	0A	1.5A	$\pm 5\%$	$\pm 1\%$	350mV

NOTE:

- 1 : Ripple & Noise is measured by using 20MHz bandwidth limited oscilloscope and terminated each output with a 0.1uF ceramic capacitor & parallel with 47uF aluminum capacitor at full load and nominal line.
- 2 : Line regulation is defined by changing $\pm 10\%$ of input voltage from nominal line at rated load.
- 3 : Max. Power (W) $\geq V_o \times I_o$

INPUT

- Input Range 100 to 240 VAC
- Frequency 50 to 60Hz
- Input Current $\leq 1A$
- Inrush Current $\leq 60A/230VAC$
- Hold Up Time $\geq 8.3ms$
- Turn On Time $\leq 3s$

PROTECTION

- Short Circuit Protection Auto Recovery
- Over Voltage Protection Latch-off
- Over Current Protection Auto Recovery


ENVIRONMENT

- Operating Temperature -20 to 40°C
- Storage Temperature -20 to 85°C
- Operating Humidity 10% to 90%
- Storage Humidity 5% to 95%

SAFETY

- Certified for whole series: ANSI/AAMI ES60601-1, CAN/CSA-C22.2 No. 60601-1, TUV EN 60601-1, CB IEC 60601-1, CE EMC(EN 60601-1-2) TUV EN 62368-1, CB IEC 62368-1, FCC Part 15B, CE EMC(EN 55032+EN 55035), CCC, UKCA
- Certified for assigned models: RCM, NRCAN

MECHANICAL

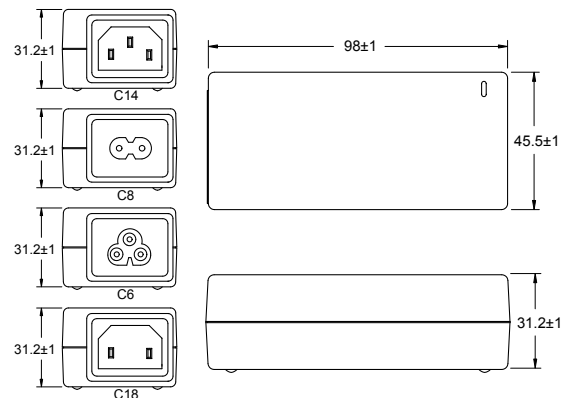

- Case Size: 98L x 45.5W x 31.2H (mm)
- AC Inlet: C14, C8, C6, C18
- Weight: 200g