

PD Charger (USB Type-C)



Features

- USB Power Delivery Function
- LED Indicator
- Protections: Short circuit / Over voltage / Over current / Over temperature (optional)
- Energy Efficiency Level VI
- No Load Power Consumption $\leq 0.1W$
- MTBF > 100,000 hours

EA1045 X R - PP

- X:** Output range
R: Interchangeable AC plug:
 • U: USA • E: EU • K: UK • A: SAA • C: China
 • S: South Africa • B: Korea • I: India
PP: DC plug Code 92 for USB Type-C

General Specification

OUTPUT

MODEL No.	MAX. OUTPUT POWER (W)	OUTPUT VOLTAGE (Vo)	MIN. LOAD (Io)	MAX. LOAD (Io)	LOAD REGULATION	LINE REGULATION	RIPPLE & NOISE
EA1045AR	30W	5V	0A	3A	$\pm 5\%$	$\pm 1\%$	100mV
		9V	0A	3A	$\pm 5\%$	$\pm 1\%$	180mV
		15V	0A	2A	$\pm 5\%$	$\pm 1\%$	300mV
		20V	0A	1.5A	$\pm 5\%$	$\pm 1\%$	360mV
EA1045BR	36W	5V	0A	3A	$\pm 5\%$	$\pm 1\%$	100mV
		9V	0A	3A	$\pm 5\%$	$\pm 1\%$	180mV
		15V	0A	2.4A	$\pm 5\%$	$\pm 1\%$	300mV
		20V	0A	1.8A	$\pm 5\%$	$\pm 1\%$	360mV
EA1045CR	45W	5V	0A	3A	$\pm 5\%$	$\pm 1\%$	100mV
		9V	0A	3A	$\pm 5\%$	$\pm 1\%$	180mV
		15V	0A	3A	$\pm 5\%$	$\pm 1\%$	300mV
		20V	0A	2.25A	$\pm 5\%$	$\pm 1\%$	360mV
EA1045DR	30W	5V	0A	3A	$\pm 5\%$	$\pm 1\%$	100mV
		9V	0A	3A	$\pm 5\%$	$\pm 1\%$	180mV
		12V	0A	2.5A	$\pm 5\%$	$\pm 1\%$	200mV
		15V	0A	2A	$\pm 5\%$	$\pm 1\%$	300mV
		20V	0A	1.5A	$\pm 5\%$	$\pm 1\%$	360mV
EA1045ER	36W	5V	0A	3A	$\pm 5\%$	$\pm 1\%$	100mV
		9V	0A	3A	$\pm 5\%$	$\pm 1\%$	180mV
		12V	0A	3A	$\pm 5\%$	$\pm 1\%$	200mV
		15V	0A	2.4A	$\pm 5\%$	$\pm 1\%$	300mV
		20V	0A	1.8A	$\pm 5\%$	$\pm 1\%$	360mV
EA1045FR	45W	5V	0A	3A	$\pm 5\%$	$\pm 1\%$	100mV
		9V	0A	3A	$\pm 5\%$	$\pm 1\%$	180mV
		12V	0A	3A	$\pm 5\%$	$\pm 1\%$	200mV
		15V	0A	3A	$\pm 5\%$	$\pm 1\%$	300mV
		20V	0A	2.25A	$\pm 5\%$	$\pm 1\%$	360mV

NOTE:

- 1 : Ripple & Noise is measured by using 20MHz bandwidth limited oscilloscope and terminated each output with a 0.1uF ceramic capacitor & parallel with 47uF aluminum capacitor at full load and nominal line.
- 2 : Line regulation is defined by changing $\pm 10\%$ of input voltage from nominal line at rated load.
- 3 : Max. Power (W) $\geq V_o \times I_o$

INPUT

- Input Range: 100 to 240 VAC
- Frequency: 50 to 60Hz
- Input Current: $\leq 1.5A$
- Inrush Current: $\leq 100A/230VAC$
- Hold Up Time: $\geq 8.3ms$
- Turn On Time: $\leq 3s$

PROTECTION

- Short Circuit Protection: Auto Recovery
- Over Voltage Protection: Auto Recovery
- Over Current Protection: Auto Recovery
- Over Temperature Protection: Auto Recovery or Latch-off (optional)


ENVIRONMENT

- Operating Temperature: -20 to 40°C
- Storage Temperature: -20 to 85°C
- Operating Humidity: 10% to 90%
- Storage Humidity: 5% to 95%

SAFETY

- Certified for whole series: UL/cUL 60950-1, TUV EN 60950-1/EN 62368-1, CB IEC 60950-1, FCC Part 15B, Complied with CE EMC(EN 55032+EN 55035)
- Certified for assigned models: PSE

MECHANICAL

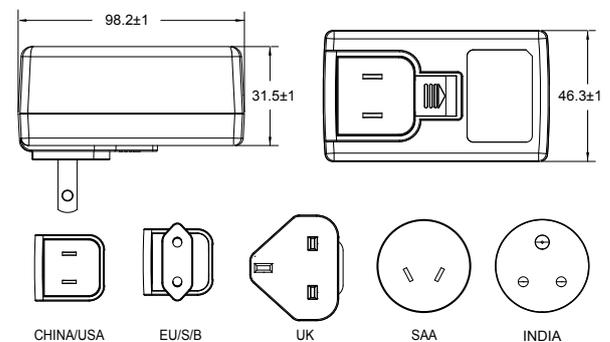

- Case Size: 98.2L x 46.3W x 31.5H (mm)
- AC Plug: U: USA, E: EU, K: UK, A: SAA, C: China
S: South Africa, B: Korea, I: India
- Weight: 200g