

EUM106AXR Series

• 45~65W Max.

Medical / ITE GaN PD Charger (USB Type-C)

Feature

- 2 x MOPP, IEC/EN60601-1 Compliance
- USB Power Delivery Function
- Gallium Nitride Based Design
- Protections:
 - Short circuit / Over voltage / Over current
 - Over temperature (optional)
- Energy Efficiency Level VI, CoC Tier II
- No Load Power Consumption $\leq 0.21W(VI)$, $\leq 0.15W(\text{CoC Tier II})$
- MTBF > 100,000 hours
- P.D. 3.0 / QC 4.0+ / QC 4.0
- Customized Solutions Available

EUM106A X R - PP

- X:** Output range
R: Interchangeable AC plug:
 • U: USA • E: EU • K: UK • A: SAA • C: China
 • S: South Africa • B: Korea • I: India
PP: DC plug code 92 for USB Type-C

General Specification

OUTPUT

MODEL No.	MAX. OUTPUT POWER (W)	OUTPUT VOLTAGE (Vo)	MIN. LOAD(Io)	MAX. LOAD(Io)	LOAD REGULATION	LINE REGULATION	RIPPLE & NOISE
EUM106AAR	45W	5V	0A	3A	$\pm 5\%$	$\pm 1\%$	120mV
		9V	0A	3A	$\pm 5\%$	$\pm 1\%$	150mV
		12V	0A	3A	$\pm 5\%$	$\pm 1\%$	180mV
		15V	0A	3A	$\pm 5\%$	$\pm 1\%$	200mV
		20V	0A	2.25A	$\pm 5\%$	$\pm 1\%$	240mV
EUM106ABR	65W	5V	0A	3A	$\pm 5\%$	$\pm 1\%$	120mV
		9V	0A	3A	$\pm 5\%$	$\pm 1\%$	150mV
		12V	0A	3A	$\pm 5\%$	$\pm 1\%$	180mV
		15V	0A	3A	$\pm 5\%$	$\pm 1\%$	200mV
		20V	0A	3.25A	$\pm 5\%$	$\pm 1\%$	240mV

NOTE:

- 1: Ripple & Noise is measured by using 20MHz bandwidth limited oscilloscope and terminated each output with a 0.1uF ceramic capacitor & parallel with 47uF aluminum capacitor at full load and nominal line.
- 2: Line regulation is defined by changing $\pm 10\%$ of input voltage from nominal line at rated load.
- 3: Max. Power (W) $\geq V_o \times I_o$


INPUT

- Input Range: 100 to 240 VAC
- Frequency: 50 to 60 Hz
- Input Current: $\leq 1.5A$
- Inrush Current: $\leq 140A/230VAC$
- Hold up time: $\geq 8.3ms$
- Turn On Time: $\leq 3s$

OUTPUT

- Short Circuit Protection: Auto Recovery
- Over Voltage Protection: Auto Recovery / Latch-off
- Over Current Protection: Auto Recovery
- Over Temperature Protection: Auto Recovery (optional)

MECHANICAL

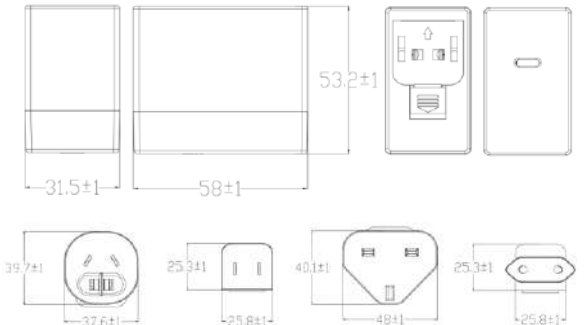

EUM106AXR Series

• 45~65W Max.

Medical / ITE GaN PD Charger (USB Type-C)

ENVIRONMENT

- Operating Temperature -20 to 40°C
- Storage Temperature -20 to 85°C
- Operating Humidity 10% to 90 %
- Storage Humidity 5% to 95 %
- Case Size: 58L x 53.2W x 31.5H (mm)
- AC Plug: U: USA, E: EU, K: UK, A: SAA, C: China
S: South Africa, B: Korea, I: India
- Weight: 180g

SAFETY

- Complied with ANSI/AAMI ES60601-1, CAN/CSA-C22.2 No. 60601-1, TUV EN 60601-1, CB IEC 60601-1, CE EMC(EN 60601-1-2), UL 62368-1, CAN/CSA C22.2 No. 62368-1, TUV EN 62368-1, CB IEC 62368-1, FCC Part 15B, CE EMC(EN 55032+EN 55035), UKCA