

AC/DC Wall Mount Adaptor



Features

- LPS Compliance
- Protections:
Short circuit / Over voltage / Over current
- Energy Efficiency Level VI or CoC Tier II
- No Load Power Consumption $\leq 0.1W$ (VI), $\leq 0.075W$ (Tier II)
- MTBF > 100,000 hours

EA1024 X Y - vv PP

- X:** Output range
Y: AC plug: • U: USA • E: EU • K: UK • A: SAA
vv: Specified output voltage, i.e. 12 is 12VDC
PP: DC plug type, i.e. Code 01 for 5.5x2.1mm or other options (refer to the appendix page)

General Specification

OUTPUT

MODEL No.	MAX. OUTPUT POWER (W)	OUTPUT VOLTAGE (Vo)	MIN. LOAD (Io)	MAX. LOAD (Io)	LOAD REGULATION	LINE REGULATION	RIPPLE & NOISE
EA1024AY	16W	5~8V	0A	2A	$\pm 5\%$	$\pm 1\%$	100mV
EA1024BY	20W	5~8V	0A	3A	$\pm 5\%$	$\pm 1\%$	100mV
EA1024CY	24W	5~8V	0A	4A	$\pm 5\%$	$\pm 1\%$	100mV
EA1024DY	18W	9~11V	0A	1.5A	$\pm 5\%$	$\pm 1\%$	250mV
EA1024EY	24W	9~11V	0A	2A	$\pm 5\%$	$\pm 1\%$	250mV
EA1024FY	27W	9~11V	0A	3A	$\pm 5\%$	$\pm 1\%$	250mV
EA1024GY	20W	12~17V	0A	1.66A	$\pm 5\%$	$\pm 1\%$	250mV
EA1024HY	30W	12~17V	0A	2.5A	$\pm 5\%$	$\pm 1\%$	250mV
EA1024JY	24W	18~24V	0A	1.33A	$\pm 5\%$	$\pm 1\%$	350mV
EA1024KY	30W	18~24V	0A	1.66A	$\pm 5\%$	$\pm 1\%$	350mV
EA1024MY	20W	36~48V	0A	0.55A	$\pm 5\%$	$\pm 1\%$	480mV
EA1024NY	30W	36~48V	0A	0.83A	$\pm 5\%$	$\pm 1\%$	480mV
EA1024PY	36W	12V	0A	3A	$\pm 5\%$	$\pm 1\%$	250mV
EA1024QY	24W	12V	0A	2A	$\pm 5\%$	$\pm 1\%$	250mV
EA1024RY	36W	24V	0A	1.5A	$\pm 5\%$	$\pm 1\%$	350mV

NOTE:

- 1 : Ripple & Noise is measured by using 20MHz bandwidth limited oscilloscope and terminated each output with a 0.1uF ceramic capacitor & parallel with 47uF aluminum capacitor at full load and nominal line.
- 2 : Line regulation is defined by changing $\pm 10\%$ of input voltage from nominal line at rated load.
- 3 : Max. Power (W) $\geq V_o \times I_o$

INPUT

- Input Range 100 to 240 VAC
- Frequency 50 to 60Hz
- Input Current $\leq 1A$
- Inrush Current $\leq 60A/230VAC$
- Hold Up Time $\geq 8.3ms$
- Turn On Time $\leq 3s$

PROTECTION

- Short Circuit Protection Auto Recovery
- Over Voltage Protection Latch-off
- Over Current Protection Auto Recovery


ENVIRONMENT

- Operating Temperature -20 to 40°C
- Storage Temperature -20 to 85°C
- Operating Humidity 10% to 90%
- Storage Humidity 5% to 95%

SAFETY

- Certified for whole series: UL 62368-1, CAN/CSA C22.2 No. 62368-1, TUV EN 62368-1, CB IEC 62368-1, FCC Part 15B, CE EMC(EN 55032+EN 55035), CCC, BSMI, UKCA
- Certified for assigned models: PSE, BIS, RCM, KC, CU, PSB, NRCAN, Argentina

MECHANICAL

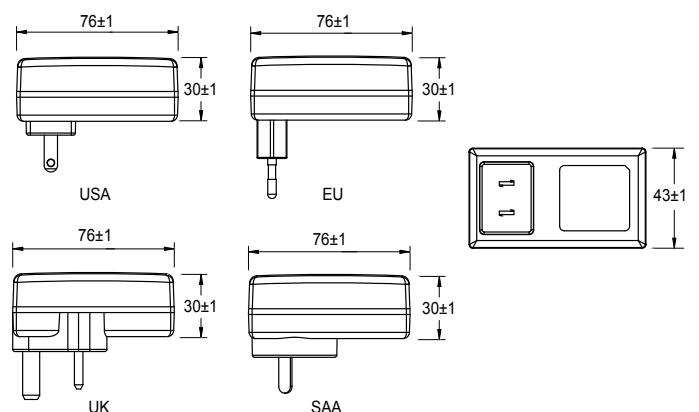

- Case Size: 76L x 43W x 30H (mm)
- AC Plug: U: USA, E: EU, K: UK, A: SAA
- Weight: 200g